



RXW Series

Features


- 105°C, 4,000 ~ 7,000 hours assured
- Low ESR, suitable for switching power supplies
- Smaller size with large permissible ripple current
- RoHS compliant



Specifications


Items	Performance																																											
Category Temperature Range	6.3 ~ 63V -55°C ~ +105°C			100V -40°C ~ +105°C																																								
Capacitance Tolerance	± 20 % (at 120 Hz, 20°C)																																											
Leakage Current (at 20°C)	I = 0.01CV or 3 (µA) whichever is greater (after 2 minutes) Where, C = rated capacitance in µF, V = rated DC working voltage in V																																											
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.22</td> <td>0.19</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> </tr> </table> <p>When the capacitance exceeds 1000µF, 0.02 shall be added every 1000µF increase.</p>								Rated Voltage	6.3	10	16	25	35	50	63	100	Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																		
Rated Voltage	6.3	10	16	25	35	50	63	100																																				
Tanδ (max)	0.22	0.19	0.16	0.14	0.12	0.10	0.09	0.08																																				
Low Temperature Characteristics (at 120 Hz)	<table border="1"> <tr> <td>Rated Voltage</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>100</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-55°C/-40°C) / Z(+20°C)</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>								Rated Voltage	6.3	10	16	25	35	50	63	100	Impedance Ratio	Z(-55°C/-40°C) / Z(+20°C)	3	3	3	3	3	3	3																		
Rated Voltage	6.3	10	16	25	35	50	63	100																																				
Impedance Ratio	Z(-55°C/-40°C) / Z(+20°C)	3	3	3	3	3	3	3																																				
Endurance	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm</td></tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td></tr> <tr> <td>Tanδ</td> <td colspan="8">Less than 200% of specified value</td></tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td></tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 ~ 7,000 hours at 105°C.</p>								Test Time	4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm								Capacitance Change	Within ±25% of initial value								Tanδ	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	4,000 Hrs for $\phi D \leq 6.3$ mm; 5,000 Hrs for $\phi D = 8$ mm; 6,000 Hrs for $\phi D = 10$ mm; 7,000 Hrs for $\phi D \geq 12.5$ mm																																											
Capacitance Change	Within ±25% of initial value																																											
Tanδ	Less than 200% of specified value																																											
Leakage Current	Within specified value																																											
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td colspan="8">1,000 Hrs</td></tr> <tr> <td>Capacitance Change</td> <td colspan="8">Within ±25% of initial value</td></tr> <tr> <td>Tanδ</td> <td colspan="8">Less than 200% of specified value</td></tr> <tr> <td>Leakage Current</td> <td colspan="8">Within specified value</td></tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>								Test Time	1,000 Hrs								Capacitance Change	Within ±25% of initial value								Tanδ	Less than 200% of specified value								Leakage Current	Within specified value							
Test Time	1,000 Hrs																																											
Capacitance Change	Within ±25% of initial value																																											
Tanδ	Less than 200% of specified value																																											
Leakage Current	Within specified value																																											
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <td>Freq.(Hz)</td> <td>120</td> <td>1k</td> <td>10k</td> <td>100k up</td> </tr> <tr> <td>Cap.(µF)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>≤ ~ 33</td> <td>0.42</td> <td>0.70</td> <td>0.90</td> <td>1.0</td> </tr> <tr> <td>39 ~ 270</td> <td>0.5</td> <td>0.73</td> <td>0.92</td> <td>1.0</td> </tr> <tr> <td>330 ~ 680</td> <td>0.55</td> <td>0.77</td> <td>0.94</td> <td>1.0</td> </tr> <tr> <td>820 ~ 1,800</td> <td>0.6</td> <td>0.80</td> <td>0.96</td> <td>1.0</td> </tr> <tr> <td>2,200 ~ 15,000</td> <td>0.7</td> <td>0.85</td> <td>0.98</td> <td>1.0</td> </tr> </table>								Freq.(Hz)	120	1k	10k	100k up	Cap.(µF)					≤ ~ 33	0.42	0.70	0.90	1.0	39 ~ 270	0.5	0.73	0.92	1.0	330 ~ 680	0.55	0.77	0.94	1.0	820 ~ 1,800	0.6	0.80	0.96	1.0	2,200 ~ 15,000	0.7	0.85	0.98	1.0	
Freq.(Hz)	120	1k	10k	100k up																																								
Cap.(µF)																																												
≤ ~ 33	0.42	0.70	0.90	1.0																																								
39 ~ 270	0.5	0.73	0.92	1.0																																								
330 ~ 680	0.55	0.77	0.94	1.0																																								
820 ~ 1,800	0.6	0.80	0.96	1.0																																								
2,200 ~ 15,000	0.7	0.85	0.98	1.0																																								

Diagram of Dimensions

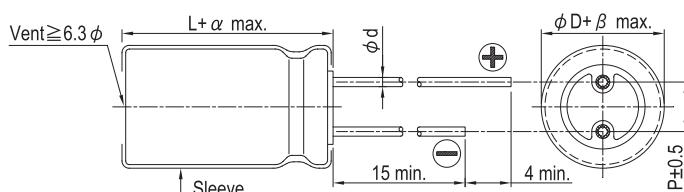

Lead Spacing and Diameter Unit: mm							
φD	5	6.3	8	10	12.5	16	18
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5
φd	0.5		0.6			0.8	
α		L<20: 1.5, L≥20: 2.0					
β			0.5				

The case size of 16×20, 18×20 and 18×25 are suitable for below diagram:

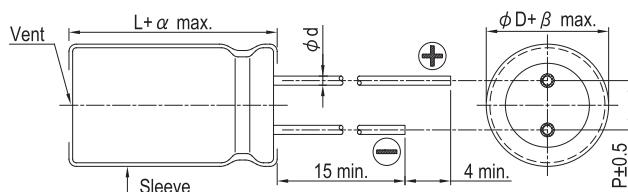

Dimension: $\phi D \times L$ (mm)Impedance: Ω at 100k Hz

Ripple Current: mA/rms at 105°C

Dimension and Permissible Ripple Current

Cap. (μF)\ Rated Volt. (Vdc)	6.3V (0J)				10V (1A)				16V (1C)				25V (1E)				
	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω , max./100kHz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz	
4.7														5x11	0.6	1.2	180
10									5x11	0.6	1.2	180		5x11	0.6	1.2	180
22	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	
33	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	
39														5x11	0.6	1.2	180
47	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	5x11	0.6	1.2	180	
56									5x11	0.6	1.2	180					
82					5x11	0.6	1.2	180					6.3x11	0.25	0.50	290	
100	5x11	0.6	1.2	180	5x11	0.6	1.2	180	6.3x11	0.25	0.5	290	6.3x11	0.25	0.50	290	
120									6.3x11	0.25	0.5	290	6.3x15	0.23	0.46	430	
150	6.3x11	0.25	0.5	290	6.3x11	0.25	0.5	290	6.3x11	0.25	0.5	290	8x11.5	0.117	0.234	555	
180					6.3x11	0.25	0.5	290	6.3x15	0.23	0.46	430					
220	6.3x11	0.25	0.5	290	6.3x11	0.25	0.5	290	8x11.5	0.117	0.234	555	8x11.5	0.117	0.234	555	
330	6.3x11 6.3x15	0.25 0.23	0.50 0.46	290 430	8x11.5	0.117	0.234	555	8x11.5	0.117	0.234	555	8x15 10x12.5	0.085 0.090	0.17 0.18	730 755	
470	8x11.5	0.117	0.234	555	8x11.5	0.117	0.234	555	8x15 10x12.5	0.085 0.090	0.17 0.18	730 755	8x20 10x16	0.065 0.136	0.130 0.20	995 1,050	
560	8x11.5	0.117	0.234	555									10x20	0.052	0.104	1,220	
680	10x12.5	0.090	0.180	755	8x15 10x12.5	0.085 0.090	0.170 0.180	730 755	8x20 10x16	0.065 0.068	0.130 0.136	995 1,050	10x20	0.052	0.104	1,220	
820	8x15 10x12.5	0.085 0.090	0.170 0.180	730 755					10x20	0.052	0.104	1,220	10x25	0.045	0.090	1,440	
1,000	10x12.5	0.090	0.180	755	8x20 10x16	0.065 0.068	0.130 0.136	995 1,050	10x20	0.052	0.104	1,220	10x30 12.5x20	0.035 0.038	0.035 0.038	1,815 1,655	
1,200	8x20 10x16	0.065 0.068	0.130 0.136	955 1,050	10x20	0.052	0.104	1,220	10x25	0.045	0.090	1,440					
1,500	10x20	0.052	0.104	1,220	10x20 10x25	0.052 0.045	0.104 0.090	1,220 1,440	12.5x20 10x30	0.038 0.035	0.076 0.070	1,655 1,815	12.5x25 16x25	0.030 0.022	0.060 0.044	1,945 2,555	
1,800													12.5x30 16x20	0.025 0.029	0.050 0.058	2,310 2,205	
2,200	10x25 12.5x20	0.045 0.038	0.090 0.076	1,440 1,615	10x30 12.5x20	0.035 0.038	0.070 0.076	1,815 1,655	12.5x25	0.030	0.06	1,945	12.5x35 16x25 18x20	0.022 0.022 0.028	0.044 0.044 0.056	2,510 2,555 2,490	
2,700	10x30	0.035	0.070	1,815	12.5x25	0.030	0.060	1,945	12.5x30 16x20	0.025 0.029	0.05	2,310 2,205	16x25	0.022	0.044	2,555	
3,300	12.5x20	0.038	0.076	1,655	12.5x25 12.5x30	0.030 0.025	0.060 0.050	1,945 2,310	16x25 12.5x35	0.022 0.022	0.044 0.044	2,555 2,510	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	
3,900	12.5x25	0.030	0.060	1,945	12.5x35 16x20	0.022 0.029	0.044 0.058	2,510 2,205	16x25 18x20	0.022 0.028	0.044 0.056	2,555 2,490	16x35.5 18x31.5	0.016 0.016	0.032 0.032	3,150 3,635	
4,700	12.5x30 16x25	0.025 0.022	0.050 0.044	2,310 2,555	16x25	0.022	0.044	2,555	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	18x35.5	0.015	0.030	3,680	
5,600	12.5x35 16x20	0.022 0.029	0.044 0.058	2,510 2,205	16x25 18x20	0.022 0.028	0.044 0.056	2,555 2,490	16x35.5 18x31.5	0.016 0.016	0.032 0.032	3,150 3,635					
6,800	16x25 18x20	0.022 0.028	0.044 0.056	2,555 2,490	16x31.5 18x25	0.018 0.020	0.036 0.040	3,010 2,740	18x35.5	0.015	0.030	3,680	18x40	0.014	0.028	3,800	
8,200	16x31.5	0.018	0.036	3,010	16x35.5 18x31.5	0.016 0.016	0.032 0.032	3,150 3,635	18x35.5	0.015	0.030	3,680					
10,000	16x31.5 18x25	0.016 0.020	0.032 0.040	3,150 2,740	18x35.5	0.015	0.030	3,680	18x40	0.014	0.028	3,800					
12,000	18x31.5	0.016	0.032	3,635													
15,000	18x35.5	0.015	0.030	3,680	18x40	0.014	0.028	3,800									

Dimension: $\phi D \times L$ (mm)Impedance: Ω at 100k Hz

Ripple Current: mA/rms at 105°C

Dimension and Permissible Ripple Current

Rated Volt. (V _{DC}) Cap. (μF)	35V (1V)				50V (1H)				63V (1J)				100V (2A)				
	$\phi D \times L$	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	$\phi D \times L$	Impedance (Ω, max./100kHz)		Ripple Current (mA/rms, 105°C)	
		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz		20°C	-10°C	100k Hz	
2.2														5×11	9.8	19.6	44
3.3														5×11	6.6	13.2	58
4.7	5×11	0.6	1.2	180	5×11	2.3	4.6	90	5×11	4.7	9.4	68	5×11	4.6	9.2	74	
6.8									5×11	2.5	5.0	95	5×11	3.5	7.0	95	
10	5×11	0.6	1.2	180	5×11	1.4	2.8	120	5×11	2.1	4.2	110	6.3×11	1.8	3.6	130	
12									5×11	2.0	4.0	145					
15									6.3×11	1.2	2.4	160	8×11.5	0.83	1.66	180	
18					5×11	1.3	2.6	155					6.3×15	0.80	1.60	200	
22	5×11	0.6	1.2	180	5×11	1.2	2.4	170	6.3×11	0.71	1.42	250	8×11.5	0.68	1.36	230	
27	5×11	0.6	1.2	180													
33	5×11	0.6	1.2	180	6.3×11	0.43	0.86	300	6.3×11	0.71	1.42	250	8×15 10×12.5	0.45 0.46	0.90 0.92	360 320	
39									6.3×15	0.70	1.40	330					
47	6.3×11	0.25	0.5	290	6.3×11	0.43	0.86	300	8×11.5	0.342	0.684	405	10×16 8×20	0.37 0.37	0.74 0.74	420 420	
56	6.3×11	0.25	0.5	290	6.3×15	0.40	0.80	360									
68									8×11.5	0.342	0.684	405	10×20	0.30	0.60	490	
82	6.3×15	0.23	0.46	430	8×11.5	0.234	0.468	485					10×25	0.25	0.50	540	
100	8×11.5	0.117	0.234	555	8×11.5	0.234	0.468	485	10×12.5 8×15	0.256 0.230	0.512 0.460	535 535	12.5×20	0.18	0.36	580	
120					8×15 10×12.5	0.155 0.162	0.310 0.324	635 615	10×16	0.194	0.388	600					
150	8×11.5	0.117	0.234	555	10×12.5	0.162	0.324	615	10×16	0.194	0.388	660	12.5×25	0.13	0.26	710	
180					8×20 10×16	0.120 0.119	0.240 0.238	860 850	10×20 12.5×16	0.147 0.150	0.294 0.300	885 1,020	12.5×30 16×20	0.12 0.13	0.24 0.26	790 750	
220	8×15 10×12.5	0.085 0.090	0.17 0.18	730 755	10×16 10×20	0.119 0.090	0.238 0.180	850 1,030	10×20 10×25	0.147 0.130	0.294 0.260	885 1,050	16×25 18×20	0.10 0.11	0.20 0.22	890 850	
270					10×25	0.082	0.164	1,200	16×16	0.090	0.180	1,410					
330	8×20 10×16	0.065 0.068	0.130 0.136	995 1,050	10×20 10×30	0.090 0.060	0.180 0.120	1,030 1,610	12.5×20	0.085	0.170	1,285	16×25	0.090	0.180	1,080	
390	10×20	0.052	0.104	1,220	12.5×20	0.063	0.126	1,480	12.5×25 18×16	0.070 0.086	0.140 0.172	1,720 1,690	18×25	0.083	0.166	1,260	
470	10×20	0.052	0.104	1,220	12.5×20	0.060	0.120	1,500	12.5×25 12.5×30 16×20	0.070 0.055 0.059	0.140 0.110 0.118	1,720 2,090 1,765	16×31.5	0.076	0.152	1,310	
560	10×25	0.045	0.090	1,440	12.5×25	0.050	0.100	1,832	16×25	0.050	0.100	2,160	18×31.5 18×35.5	0.068 0.064	0.136 0.128	1,370 1,410	
680	10×30 12.5×20	0.035 0.038	0.070 0.076	1,815 1,655	12.5×25 16×20	0.050 0.048	0.100 0.096	1,832 1,835	12.5×35 18×20	0.047 0.055	0.094 0.110	2,265 2,290					
820					12.5×35 18×20	0.034 0.042	0.068 0.084	2,285 2,200	16×31.5 18×25	0.043 0.043	0.086 0.086	2,670 2,585	18×40	0.047	0.094	1,520	
1,000	12.5×25	0.030	0.060	1,945	16×25	0.034	0.068	2,235	16×31.5 16×35.5	0.043 0.036	0.086 0.072	2,670 2,770					
1,200	12.5×30 16×20	0.025 0.029	0.050 0.058	2,310 2,205	16×31.5 18×25	0.028 0.029	0.056 0.058	2,700 2,610	18×31.5	0.032	0.064	2,950					
1,500	12.5×35 16×25	0.022	0.044	2,510 2,555	16×31.5 16×35.5	0.028 0.025	0.056 0.050	2,700 2,790	18×35.5	0.030	0.060	3,095					
1,800	16×25 18×20	0.022 0.028	0.044 0.056	2,555 2,490	18×31.5	0.025	0.05	3,000									
2,200	16×31.5 18×25	0.018 0.020	0.036 0.040	3,010 2,740	18×35.5	0.023	0.046	3,100	18×40	0.028	0.056	3,200					
2,700	16×35.5 18×31.5	0.016 0.016	0.032 0.032	3,150 3,635													
3,300	18×35.5	0.015	0.030	3,680													
4,700	18×40	0.014	0.028	3,800													

Part Numbering System

RXW Series	470μF	±20%	6.3V	Bulk Package	Gas Type	8 φ × 11.5L	General Purpose
RXW	471	M	0J	BK	-	0811	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Lead Configuration and Package	Rubber Type	Case Size	Application

Note: For more details, please refer to "Part Numbering System - Radial Type" on page 139.