

VLW Series

Features

- 12.5φ ~ 16φ, 125°C, 2,000 hours assured
- Suitable for automotive application
- Peak acceleration: 50G / 30G
- RoHS Compliance




Marking color: Black

Specifications

Items	Performance																							
Category Temperature Range	-40°C ~ +125°C																							
Capacitance Tolerance	±20% (at 120Hz, 20°C)																							
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF V = rated DC working voltage in V																							
Tanδ (at 120Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.32</td> <td>0.24</td> <td>0.21</td> <td>0.18</td> <td>0.15</td> </tr> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>	Rated Voltage	10	16	25	35	50	Tanδ (max)	0.32	0.24	0.21	0.18	0.15											
Rated Voltage	10	16	25	35	50																			
Tanδ (max)	0.32	0.24	0.21	0.18	0.15																			
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z(-40°C)/Z(+20°C)</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated Voltage		10	16	25	35	50	Impedance Ratio	Z(-25°C)/Z(+20°C)	3	2	2	2	2	Z(-40°C)/Z(+20°C)	5	4	3	3	3			
Rated Voltage		10	16	25	35	50																		
Impedance Ratio	Z(-25°C)/Z(+20°C)	3	2	2	2	2																		
	Z(-40°C)/Z(+20°C)	5	4	3	3	3																		
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 125°C.</p>	Test Time	2,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value															
Test Time	2,000 Hrs																							
Capacitance Change	Within ±30% of initial value																							
Tanδ	Less than 300% of specified value																							
Leakage Current	Within specified value																							
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value															
Test Time	1,000 Hrs																							
Capacitance Change	Within ±30% of initial value																							
Tanδ	Less than 300% of specified value																							
Leakage Current	Within specified value																							
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <th rowspan="2">Cap. (μF)</th> <th colspan="5">Frequency(Hz)</th> </tr> <tr> <th>50, 60</th> <th>120</th> <th>1k</th> <th>10k up</th> <th></th> </tr> <tr> <td>Under 330</td> <td>0.80</td> <td>1.0</td> <td>1.25</td> <td>1.40</td> <td></td> </tr> <tr> <td>330 < C ≤ 2,200</td> <td>0.85</td> <td>1.0</td> <td>1.20</td> <td>1.30</td> <td></td> </tr> </table>	Cap. (μF)	Frequency(Hz)					50, 60	120	1k	10k up		Under 330	0.80	1.0	1.25	1.40		330 < C ≤ 2,200	0.85	1.0	1.20	1.30	
Cap. (μF)	Frequency(Hz)																							
	50, 60	120	1k	10k up																				
Under 330	0.80	1.0	1.25	1.40																				
330 < C ≤ 2,200	0.85	1.0	1.20	1.30																				
Vibration	<p>Peak acceleration: 50G Peak to peak amplitude: 1.5mm</p> <p>Frequency: 5 to 2,000 Hz reciprocation for 20 min.</p> <p>Direction and duration of vibration: 3 orthogonal directions mutually each for 4 Hrs.</p>																							

Diagram of Dimensions

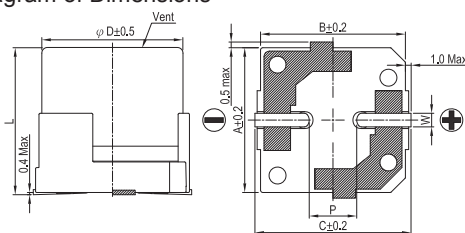


Lead Spacing and Diameter

φD	L	A	B	C	W	P ± 0.2
12.5	13.5 ± 0.5	13.0	13.5	14.5	1.1 ~ 1.4	4.4
12.5	16 ± 0.5	13.0	13.5	14.5	1.1 ~ 1.4	4.4
16	16.5 ± 0.5	16.5	17.0	18.2	1.1 ~ 1.4	6.4

Unit: mm

Marking



Dimension & Permissible Ripple Current

Dimension: φD × L(mm)

Ripple Current: mA/rms at 120 Hz, 125°C

V. DC μF	Contents	10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA	φD×L	mA
100	101									12.5×13.5	380
220	221							12.5×13.5	380	12.5×16	430
330	331			12.5×13.5	500	12.5×13.5	500	16×16.5	680	16×16.5	680
470	471	12.5×13.5	500	12.5×13.5	500	12.5×13.5	500	16×16.5	680	16×16.5	680
680	681	12.5×13.5	500	12.5×13.5	500	12.5×16	600	16×16.5	680		
1,000	102	12.5×16	600	12.5×16	600	16×16.5	680				
1,500	152	12.5×16	600	16×16.5	680						
2,200	222	16×16.5	680								

Part Numbering System

VLW series	470μF	±20%	16V	Carrier Tape	Anti-vibration structure (30G)	12.5φ × 13.5L	Pb-free and PET coating case
VLW	471	M	1C	TR	K	1313	
Series name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 13.