

LV/LVG Series

Features

- Snap-in terminal type
- Suitable for high voltage circuits
- Flame retardant type capacitor
- RoHS Compliance




Sleeve & Marking Color: Black & White

Specifications

Items	Performance																
	LV		LVG														
Series	LV		LVG														
Category Temperature Range	-25°C ~ +85°C		-25°C ~ +105°C														
Capacitance Tolerance	±20% (at 120Hz, 20°C)																
Leakage Current (at 20°C)	I = 3√CV or 1.5 mA whichever is smaller (after 5 minutes) Where, C = rated capacitance in µF, V = rated DC Rated Voltage in V																
Tanδ (at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Tanδ (max)</td> <td>LV</td> <td>0.15</td> <td>0.25</td> </tr> <tr> <td>LVG</td> <td>0.25</td> <td>0.25</td> </tr> </tbody> </table>				Rated Voltage		400	450	Tanδ (max)	LV	0.15	0.25	LVG	0.25	0.25		
Rated Voltage		400	450														
Tanδ (max)	LV	0.15	0.25														
	LVG	0.25	0.25														
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below. <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>LV</td> <td>8</td> <td>12</td> </tr> <tr> <td></td> <td>LVG</td> <td>12</td> <td>12</td> </tr> </tbody> </table>				Rated Voltage		400	450	Impedance Ratio	Z(-25°C)/Z(+20°C)	LV	8	12		LVG	12	12
Rated Voltage		400	450														
Impedance Ratio	Z(-25°C)/Z(+20°C)	LV	8	12													
		LVG	12	12													
Endurance	<table border="1"> <thead> <tr> <th>Test Time</th> <th>2,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 hours at 85°C / 105°C.</p>				Test Time	2,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value					
Test Time	2,000 Hrs																
Capacitance Change	Within ±20% of initial value																
Tanδ	Less than 200% of specified value																
Leakage Current	Within specified value																
Shelf Life Test	<table border="1"> <thead> <tr> <th>Test Time</th> <th>1,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 150% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C / 105°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1).</p>				Test Time	1,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 150% of specified value	Leakage Current	Within specified value					
Test Time	1,000 Hrs																
Capacitance Change	Within ±20% of initial value																
Tanδ	Less than 150% of specified value																
Leakage Current	Within specified value																
Ripple Current and Frequency Multipliers	<table border="1"> <thead> <tr> <th>Frequency (Hz)</th> <th>50 / 60</th> <th>100 / 120</th> <th>500</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.8</td> <td>1.0</td> <td>1.05</td> <td>1.10</td> <td>1.15</td> </tr> </tbody> </table>				Frequency (Hz)	50 / 60	100 / 120	500	1k	10k up	Multiplier	0.8	1.0	1.05	1.10	1.15	
Frequency (Hz)	50 / 60	100 / 120	500	1k	10k up												
Multiplier	0.8	1.0	1.05	1.10	1.15												
Failure percentage	≤ 3 % (During useful life)																
Failure rate	≤ 70 fit (70×10 ⁻⁹ /h)																

Diagram of Dimensions

Unit: mm

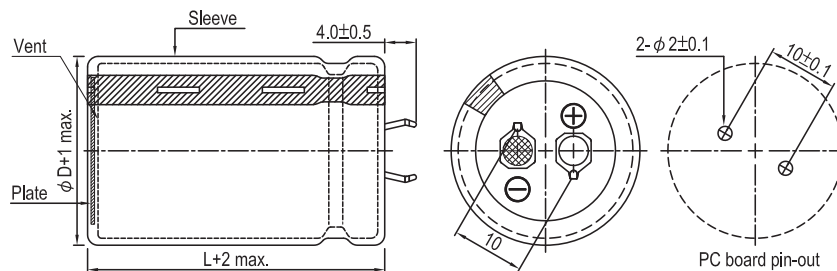



Dimension and Permissible Ripple Current

1. LV Series

Rated Voltage V _{DC}	Capacitance 120Hz, 20°C μF	φ D×L mm	Ripple Current 120 Hz, 85°C A/rms	Tan δ at 120Hz, 20°C	ESR 120Hz, 20°C Ω	LC 5 minutes mA	Part Number
400	330	35 × 30	1.95	0.15	0.603	1.09	LV-331M2G--A3530
	390	35 × 35	2.17	0.15	0.510	1.18	LV-391M2G--A3535
	470	35 × 40	2.42	0.15	0.423	1.30	LV-471M2G--A3540
	560	35 × 45	2.71	0.15	0.355	1.42	LV-561M2G--A3545
	680	35 × 50	2.95	0.15	0.293	1.50	LV-681M2G--A3550
450	220	35 × 30	1.71	0.25	1.508	0.94	LV-221M2W--A3530
	270	35 × 35	1.81	0.25	1.229	1.05	LV-271M2W--A3535
	330	35 × 35	2.05	0.25	1.005	1.16	LV-331M2W--A3535
	390	35 × 40	2.27	0.25	0.851	1.26	LV-391M2W--A3540
	470	35 × 45	2.55	0.25	0.706	1.38	LV-471M2W--A3545
	560	35 × 50	2.60	0.25	0.592	1.50	LV-561M2W--A3550

2. LVG Series


Rated Voltage V _{DC}	Capacitance 120Hz, 20°C μF	φ D×L mm	Ripple Current 120 Hz, 105°C A/rms	Tan δ at 120Hz, 20°C	ESR 120Hz, 20°C Ω	LC 5 minutes mA	Part Number
400	180	35 × 25	0.90	0.25	1.843	0.80	LVG181M2G--A3525
	220	35 × 30	1.08	0.25	1.507	0.89	LVG221M2G--A3530
	270	35 × 35	1.12	0.25	1.228	0.98	LVG271M2G--A3535
	330	35 × 35	1.18	0.25	1.005	1.09	LVG331M2G--A3535
	390	35 × 40	1.27	0.25	0.851	1.18	LVG391M2G--A3540
	470	35 × 45	1.62	0.25	0.706	1.30	LVG471M2G--A3545
	560	35 × 50	1.83	0.25	0.592	1.42	LVG561M2G--A3550
450	120	35 × 25	0.72	0.25	2.765	0.70	LVG121M2W--A3525
	150	35 × 30	0.86	0.25	2.212	0.78	LVG151M2W--A3530
	180	35 × 35	1.00	0.25	1.843	0.85	LVG181M2W--A3535
	220	35 × 35	1.11	0.25	1.508	0.94	LVG221M2W--A3535
	270	35 × 45	1.36	0.25	1.229	1.05	LVG271M2W--A3545
	330	35 × 50	1.58	0.25	1.005	1.16	LVG331M2W--A3550

Part Numbering System


LVG Series	100μF	±20%	400V		4.0±0.5mm	22 φ ×30L	Pb-free Terminal + Sleeve	
LVG	101	M	2G	--	A	2230	Terminal and Sleeve Type	
Series Name	Capacitance	Capacitance tolerance	Rated voltage	Terminal type	Terminal length	Case size		
Example:		M = ±20% K = ±10%	Example:	Example:	Example:	Example:		
Cap.	Symbol		WV	Symbol	Type	Symbol	φ D×L	Code
56	560		400	2G	2 pins	--	22×30	2230
220	221		450	2W	5 pins	L5	25×25	2525
470	471						30×40	3040

Note: For more details, please refer to "Part Numbering System (Snap-in Type)" on page 16.

Typical Endurance Curves

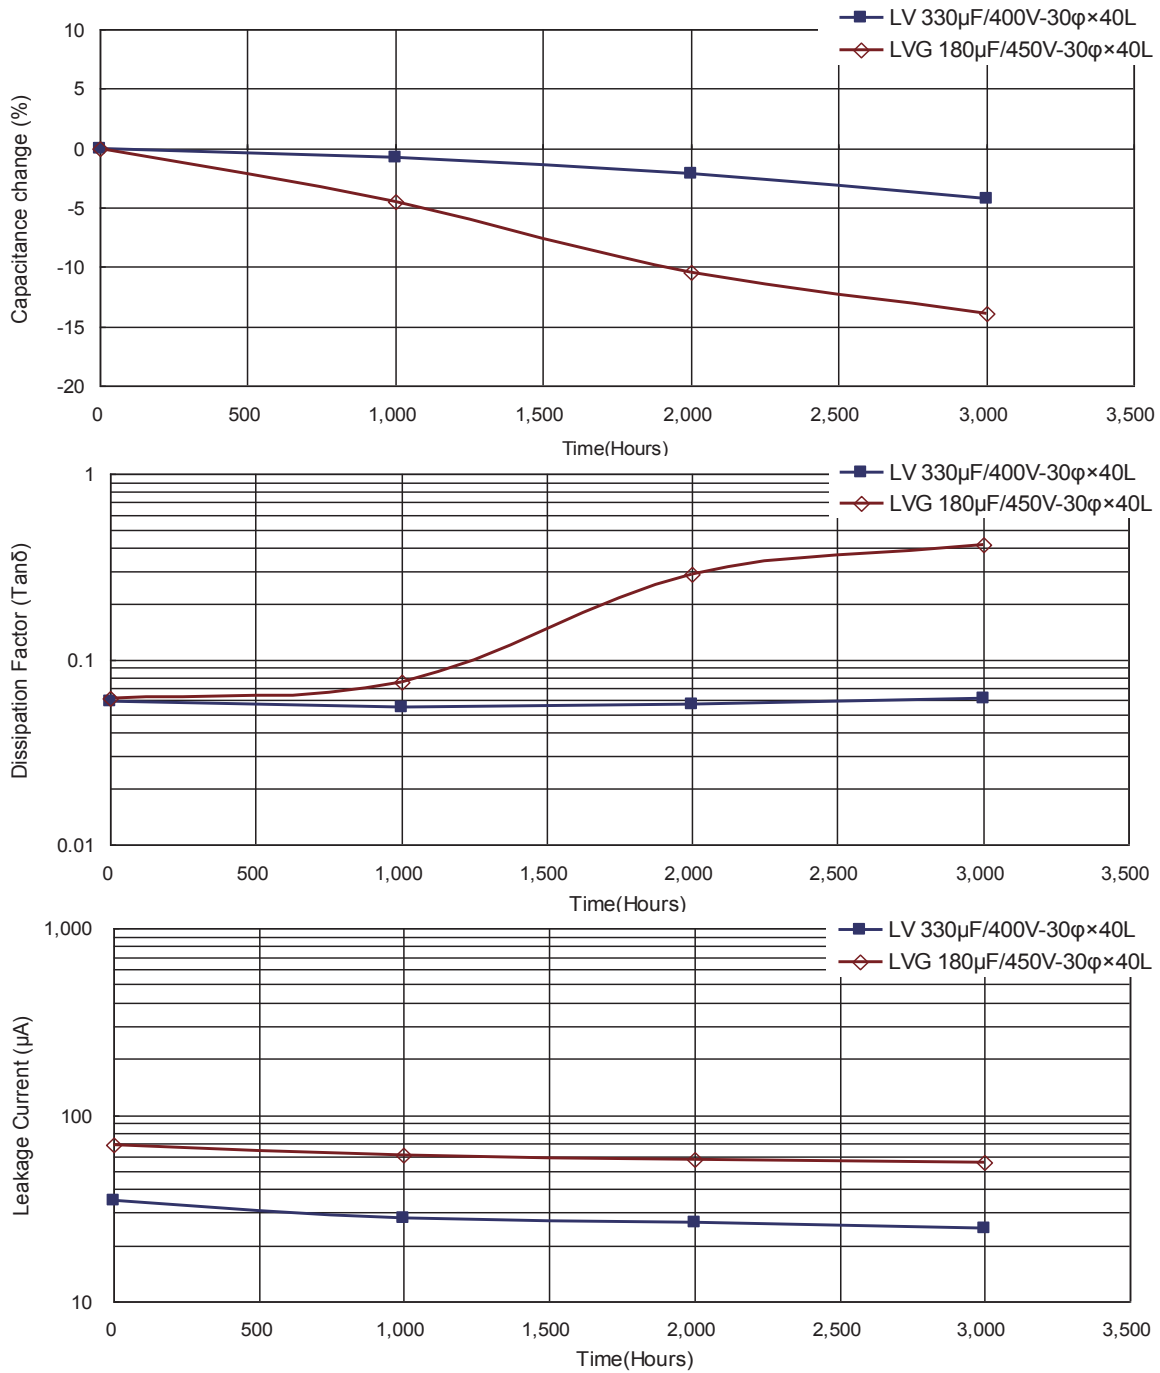

Useful Life Chart LV Series

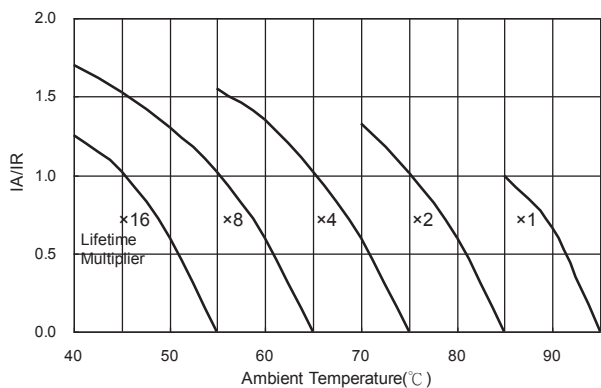

IA: Actual ripple current IR: Rated ripple current

LVG Series

