

HBS Series

Features

- 125°C, 4,000 hours assured
- Low ESR and High ripple current
- RoHS compliant




Marking color: Dark Green

Specifications

Items	Performance																						
Category Temperature Range	-55°C ~ +125°C																						
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																						
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																						
Tanδ (at 120 Hz, 20°C)	See Standard Ratings																						
Low Temperature Characteristics (at 100k Hz)	Impedance ratio shall not exceed the values given in the table below																						
	<table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Impedance ratio</td> <td>Z (-25°C) / Z (+20°C)</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> <td>1.5</td> </tr> <tr> <td>Z (-55°C) / Z (+20°C)</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> <td>2.0</td> </tr> </tbody> </table>	Rated Voltage		16	25	35	50	63	80	Impedance ratio	Z (-25°C) / Z (+20°C)	1.5	1.5	1.5	1.5	1.5	1.5	Z (-55°C) / Z (+20°C)	2.0	2.0	2.0	2.0	2.0
Rated Voltage		16	25	35	50	63	80																
Impedance ratio	Z (-25°C) / Z (+20°C)	1.5	1.5	1.5	1.5	1.5	1.5																
	Z (-55°C) / Z (+20°C)	2.0	2.0	2.0	2.0	2.0	2.0																
Endurance	Test Time	4,000 Hrs																					
	Capacitance Change	Within ±30% of initial value																					
	Tanδ	Less than 200% of specified value																					
	ESR	Less than 200% of specified value																					
	Leakage Current	Within specified value																					
Shelf Life Test	* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 hours at 125°C. * After storage for 1,000 hours at 125 ± 2°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)																						
Resistance to Soldering Heat	Capacitance Change	Within ±10% of initial value																					
	Tanδ	Within specified value																					
	ESR	Within specified value																					
	Leakage Current	Within specified value																					
Ripple Current and Frequency Multipliers	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k																		
	Multiplier	0.1	0.3	0.6	1.0																		

Diagram of Dimensions

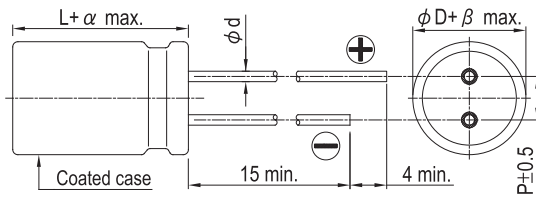

Lead Spacing and Diameter



Unit: mm

φD	6.3	6.3	8	10	10
L	6	8	10	10	12
P	2.5	2.5	3.5	5.0	5.0
φd	0.45		0.6		
α	1.0				
β	0.5				

Marking

φD = 6.3

φD = 8 ~ 10

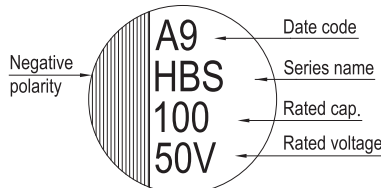



Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 100k Hz, 125°C

Standard Ratings

Rated Voltage (V)	Surge Voltage (V)	Capacitance (μ F)	Size $\phi D \times L$ (mm)	Tan δ (120 Hz, 20°C)	L C (μ A)	E S R (m Ω /at 100kHz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 125°C)
16V (1C)	18.4	82	6.3 × 6	0.16	13.1	50	900
		150	6.3 × 8		24.0	30	1,400
		270	8 × 10		43.2	27	1,600
		470	10 × 10		75.2	20	2,000
25V (1E)	28.8	47	6.3 × 6	0.14	11.8	50	900
		56			14.0		
		68			17.0		
		100	6.3 × 8		17.0	30	1,400
		150	6.3 × 8		25.0	30	1,400
		220	8 × 10		37.5	27	1,600
		330	8 × 10		55.0	27	1,600
		330	10 × 10		82.5	20	2,000
35V (1V)	40.3	27	6.3 × 6	0.12	9.5	60	900
		33			11.6		
		47			16.5		
		68	6.3 × 8		23.8	35	1,400
		100	8 × 10		35.0	27	1,600
		150	8 × 10		52.5	27	1,600
		220	10 × 10		77.0	20	2,000
		270	10 × 10		94.5	20	2,000
50V(1H)	57.5	22	6.3 × 6	0.10	11.0	80	750
		33	6.3 × 8		16.5	40	1,100
		47	8 × 10		23.5	30	1,250
		68	8 × 10		34.0	30	1,250
		100	10 × 10		50.0	28	1,600
		120	10 × 10		60.0	28	1,600
63V(1J)	72.5	10	6.3 × 6	0.08	6.3	120	700
		22	6.3 × 8		13.9	80	900
		27	8 × 10		17.0	40	1,100
		33			20.8		
		47	29.6		35.3	30	1,400
		56	10 × 10		35.3	26	1,500
		68	10 × 10		42.8	30	1,400
		82	10 × 10		51.7	30	1,400
80V (1K)	92.0	22	8 × 10	0.08	17.6	45	1,050
		33	10 × 10		26.4	36	1,360
		47	10 × 10		37.6	36	1,360

Hybrid

Part Numbering System

HBS Series 220 μ F \pm 20% 25V Bulk Package Gas Type 8 ϕ × 10L General Purpose

HBS **221** **M** **1E** **BK** - **0810**
 Series Name Capacitance Capacitance Tolerance Rated Voltage Lead Configuration and Package Rubber Type Case Size Application

Note: For more details, please refer to "Part Numbering System" on page 87.