

VZR Series

Features

- $5\phi \sim 10\phi$, 105°C, 7,000 hours assured
- Low Impedance temperature range up to +105°C
- For automobile modules and high temperature applications
- RoHS compliant
- AEC-Q200 compliant




Marking color: Black

Specifications

Items	Performance																
Category Temperature Range	-25°C ~ +105°C																
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																
Leakage Current (at 20°C)	I = 0.01CV or 3 (μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																
Tanδ (at 120 Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.32</td> <td>0.28</td> <td>0.26</td> <td>0.16</td> <td>0.14</td> <td>0.14</td> </tr> </tbody> </table>	Rated Voltage	6.3	10	16	25	35	50	Tanδ (max)	0.32	0.28	0.26	0.16	0.14	0.14		
Rated Voltage	6.3	10	16	25	35	50											
Tanδ (max)	0.32	0.28	0.26	0.16	0.14	0.14											
Low Temperature Characteristics (at 120 Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> </tr> </thead> <tbody> <tr> <td>Impedance Ratio</td> <td>Z(-25°C)/Z(+20°C)</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> </tbody> </table>	Rated Voltage		6.3	10	16	25	35	50	Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
Rated Voltage		6.3	10	16	25	35	50										
Impedance Ratio	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2										
Endurance	<table border="1"> <tbody> <tr> <td>Test Time</td> <td>7,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 7,000 hours at 105°C.</p>	Test Time	7,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value								
Test Time	7,000 Hrs																
Capacitance Change	Within ±30% of initial value																
Tanδ	Less than 300% of specified value																
Leakage Current	Within specified value																
Shelf Life Test	<table border="1"> <tbody> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value								
Test Time	1,000 Hrs																
Capacitance Change	Within ±30% of initial value																
Tanδ	Less than 300% of specified value																
Leakage Current	Within specified value																
Ripple Current and Frequency Multipliers	<table border="1"> <thead> <tr> <th>Frequency(Hz)</th> <th>50</th> <th>120</th> <th>1k</th> <th>10k up</th> </tr> </thead> <tbody> <tr> <td>Multiplier</td> <td>0.35</td> <td>0.50</td> <td>0.83</td> <td>1.0</td> </tr> </tbody> </table>	Frequency(Hz)	50	120	1k	10k up	Multiplier	0.35	0.50	0.83	1.0						
Frequency(Hz)	50	120	1k	10k up													
Multiplier	0.35	0.50	0.83	1.0													

Diagram of Dimensions

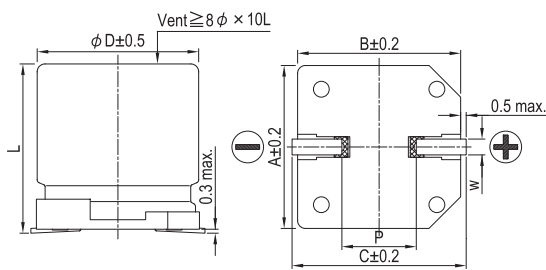

Lead Spacing and Diameter



Unit: mm

φD	L	A	B	C	W	P ± 0.2
5	7 ± 0.3	5.3	5.3	5.9	0.5 ~ 0.8	1.5
6.3	7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	8.7 ± 0.5	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	10 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1
10	10 ± 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7

Marking

φD = 5 ~ 6.3 mm

φD = 8 ~ 10 mm

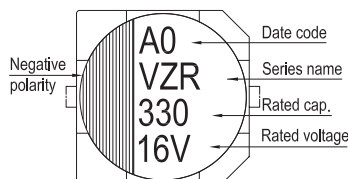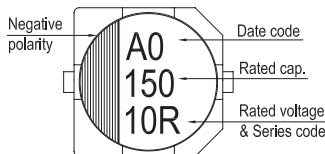



Dimension: $\phi D \times L$ (mm)
 Ripple Current: mA/rms at 100k Hz, 105°C
 Impedance: Ω / at 100k Hz, 20°C

Dimension and Permissible Ripple Current

Rated Volt. (V _{DC})		6.3V (0J)			10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)		
Cap. (μF)	Contents	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
10	100													5×7	2.2	95			
22	220							5×7	2.2	95	5×7	2.2	95	5×7	2.2	95			
33	330				5×7	2.2	95				6.3×7	1.1	140	6.3×8.7	1.0	230			
47	470	5×7	2.2	95				6.3×7	1.1	140	6.3×7	1.1	140	6.3×8.7	1.0	230	8×10	0.53	350
100	101	6.3×7	1.1	140				6.3×7	1.1	140	6.3×8.7	1.0	230				8×10	0.53	350
150	151				6.3×7	1.1	140	6.3×8.7	1.0	230									
220	221	6.3×8.7	1.0	230				6.3×8.7	1.0	230	8×10	0.22	600	8×10	0.22	600	10×10	0.35	670
330	331	6.3×8.7	1.0	230				8×10	0.22	600	8×10	0.22	600	10×10	0.16	850			
470	471	8×10	0.22	600				8×10	0.22	600	10×10	0.16	850						

Part Numbering System

VZR Series 470μF ±20% 6.3V Carrier Tape 8φ×10L General Purpose

VZR **471** **M** **0J** **TR** - **0810**

Series Name Capacitance Capacitance Tolerance Rated Voltage Package Type Terminal Type Case Size Application

Note: For more details, please refer to "Part Numbering System - SMD Type" on page 106.

SMD