

VUP Series

Features

- 6.3 ϕ ~ 18 ϕ , 125°C, 2,000 ~ 4,000 hours assured
- Low impedance capacitors
- Chip type high temperature range, for +125°C use
- For automobile modules and other high temperature applications
- RoHS compliant, AEC-Q200 compliant



Marking color: Black

Specifications

Items	Performance																			
Category Temperature Range	-40°C ~ +125°C																			
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																			
Leakage Current (at 20°C)	I = 0.01CV or 3(μA) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																			
Tanδ (at 120 Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.30</td> <td>0.23</td> <td>0.18</td> <td>0.16</td> <td>0.16</td> <td>0.12</td> <td>0.12</td> <td>0.10</td> </tr> </table> <p>When the capacitance exceeds 1,000 μF, 0.02 shall be added every 1,000μF increase.</p>	Rated Voltage	10	16	25	35	50	63	80	100	Tanδ (max)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10	
Rated Voltage	10	16	25	35	50	63	80	100												
Tanδ (max)	0.30	0.23	0.18	0.16	0.16	0.12	0.12	0.10												
Low Temperature Characteristics (at 120 Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td>Rated Voltage</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Impedance Ratio</td> <td>Z(-40°C) / Z(+20°C)</td> <td>12</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	Rated Voltage	10	16	25	35	50	63	80	100	Impedance Ratio	Z(-40°C) / Z(+20°C)	12	8	6	4	4	3	3	3
Rated Voltage	10	16	25	35	50	63	80	100												
Impedance Ratio	Z(-40°C) / Z(+20°C)	12	8	6	4	4	3	3	3											
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs for $\phi D = 6.3$ mm 3,000 Hrs for $\phi D = 8 \sim 12.5$ mm 3,500 Hrs for $16 \sim 18 \phi \times 16.5L$ 4,000 Hrs for $16 \sim 18 \phi \times 21.5L$</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 ~ 4,000 hours at 125°C.</p>	Test Time	2,000 Hrs for $\phi D = 6.3$ mm 3,000 Hrs for $\phi D = 8 \sim 12.5$ mm 3,500 Hrs for $16 \sim 18 \phi \times 16.5L$ 4,000 Hrs for $16 \sim 18 \phi \times 21.5L$	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value											
Test Time	2,000 Hrs for $\phi D = 6.3$ mm 3,000 Hrs for $\phi D = 8 \sim 12.5$ mm 3,500 Hrs for $16 \sim 18 \phi \times 16.5L$ 4,000 Hrs for $16 \sim 18 \phi \times 21.5L$																			
Capacitance Change	Within ±30% of initial value																			
Tanδ	Less than 300% of specified value																			
Leakage Current	Within specified value																			
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±30% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 300% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied.</p>	Test Time	1,000 Hrs	Capacitance Change	Within ±30% of initial value	Tanδ	Less than 300% of specified value	Leakage Current	Within specified value											
Test Time	1,000 Hrs																			
Capacitance Change	Within ±30% of initial value																			
Tanδ	Less than 300% of specified value																			
Leakage Current	Within specified value																			
Ripple Current and Frequency Multipliers	<table border="1"> <tr> <td>Frequency (Hz)</td> <td>50</td> <td>120</td> <td>300</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multiplier</td> <td>0.35</td> <td>0.50</td> <td>0.64</td> <td>0.83</td> <td>1.0</td> </tr> </table>	Frequency (Hz)	50	120	300	1k	10k up	Multiplier	0.35	0.50	0.64	0.83	1.0							
Frequency (Hz)	50	120	300	1k	10k up															
Multiplier	0.35	0.50	0.64	0.83	1.0															

Diagram of Dimensions

Fig. 1


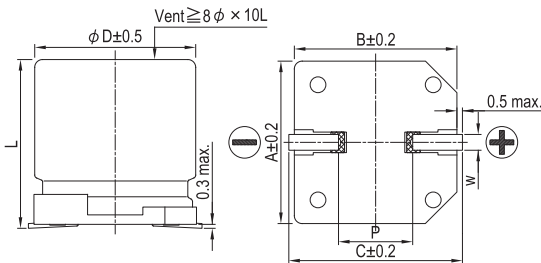


Fig. 2

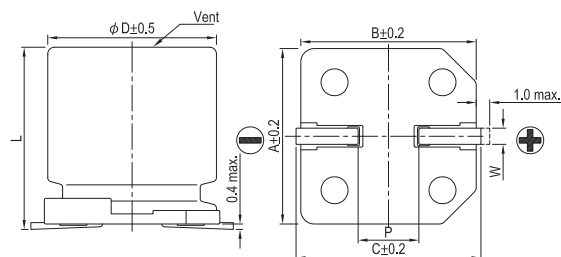


Lead Spacing and Diameter

Unit: mm


ϕD	L	A	B	C	W	P ± 0.2	Fig. No.
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0	1
8	10 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1	1
10	10 ± 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7	1
12.5	13.5 ± 0.5	13.0	13.0	13.7	1.1 ~ 1.4	4.4	2
16	16.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
16	21.5 ± 0.5	17.0	17.0	18.0	1.1 ~ 1.4	6.4	2
18	16.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2
18	21.5 ± 0.5	19.0	19.0	20.0	1.1 ~ 1.4	6.4	2

Marking


$\phi D = 6.3 \text{ mm}$

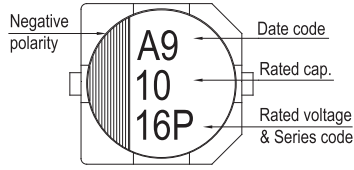

$\phi D = 8 \sim 10 \text{ mm}$

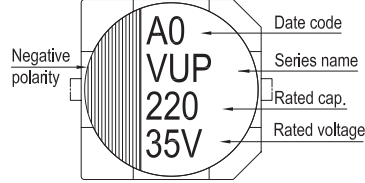

$\phi D \geq 12.5 \text{ mm}$

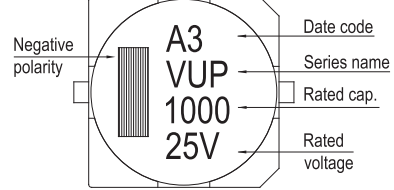

Dimension: $\phi D \times L(\text{mm})$

Ripple Current: mA/rms at 100k Hz, 125°C

Impedance: Ω at 100k Hz, 20°C

Dimension and Permissible Ripple Current

Rated Volt. (V _{DC})		10V (1A)			16V (1C)			25V (1E)			35V (1V)			50V (1H)			63V (1J)		
Cap. (μF)	Contents	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
10	100																6.3×7.7	2.0	60
22	22													6.3×7.7	0.5	197	8×10	0.7	100
33	330										6.3×7.7	0.5	197	6.3×7.7	0.5	197	8×10	0.7	100
47	470										6.3×7.7	0.5	197	8×10	0.25	270	10×10	0.5	170
82	820										8×10	0.2	270	8×10	0.25	270	8×10	0.7	100
100	101				6.3×7.7	0.5	197	6.3×7.7	0.5	197	8×10	0.2	270	10×10	0.2	500	10×10	0.5	170
150	151																12.5×13.5	0.2	1,000
180	181																12.5×13.5	0.2	1,000
220	221	8×10	0.2	270	8×10	0.2	270	8×10	0.2	270	10×10	0.15	500	10×10	0.15	500	12.5×13.5	0.2	1,000
330	331	8×10	0.2	270	10×10	0.15	500	10×10	0.15	500									
390	391	10×10	0.15	500	10×10	0.15	500										16×16.5	0.13	1,900
470	471	10×10	0.15	500	10×10	0.15	500				12.5×13.5	0.08	1,700	16×16.5	0.08	2,000	18×16.5	0.11	2,000
560	561										12.5×13.5	0.08	1,700	16×16.5	0.08	2,000	16×21.5	0.07	2,500
680	681										12.5×13.5	0.08	1,700	18×16.5	0.078	2,100			
750	751																18×21.5	0.068	2,600
820	821							12.5×13.5	0.08	1,700	16×16.5	0.05	2,400	18×16.5	0.078	2,100			
1,000	102							12.5×13.5	0.08	1,700	16×16.5	0.05	2,400	16×21.5	0.04	2,800			
1,200	122							16×16.5	0.05	2,400	18×16.5	0.045	2,600	18×21.5	0.038	2,900			
1,400	142										18×16.5	0.045	2,600						
1,600	162							16×16.5	0.05	2,400	16×21.5	0.038	3,000						
2,200	222							18×16.5	0.045	2,600	18×21.5	0.032	3,250						
2,700	272							16×21.5	0.038	3,000									
3,300	332							18×21.5	0.032	3,250									

Rated Volt. (V _{DC})		80V (1K)			100V (2A)		
Cap. (μF)	Contents	$\phi D \times L$	Imp.	mA	$\phi D \times L$	Imp.	mA
10	100	8×10	0.75	70	8×10	0.75	70
22	22	8×10	0.75	70	8×10	0.75	70
		10×10	0.55	115	10×10	0.55	115
33	330	8×10	0.75	70	10×10	0.55	115
		10×10	0.55	115			
47	470	10×10	0.55	115			
82	820				12.5×13.5	0.28	700
150	151	12.5×13.5	0.28	700	16×16.5	0.19	1,000
180	181				18×16.5	0.17	1,100
220	221				16×21.5	0.12	1,600
270	271	16×16.5	0.19	1,000			
300	301				18×21.5	0.11	1,700
330	331	18×16.5	0.17	1,100			
390	391	16×21.5	0.12	1,600			
520	521	18×21.5	0.11	1,700			

Part Numbering System

VUP series	100 μF	$\pm 20\%$	16V	Carrier Tape	6.3 ϕ × 7.7L	General Purpose
VUP	101	M	1C	TR	-	0607
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case Size

Note: For more details, please refer to "Part Numbering System - SMD Type" on page 106.

SMD