



## LSR Series

### Features

- Snap-in terminal type
- 105°C, 3,000 hours assured
- High Ripple current.
- RoHS compliant




### Specifications

Items	Performance								
Category Temperature Range	400 ~ 450V -25°C ~ +105°C								
Capacitance Tolerance	± 20% (at 120 Hz, 20°C)								
Leakage Current (at 20°C)	$I = 3\sqrt{CV}$ or 1.5 mA whichever is smaller (after 5 minutes) Where, C = rated capacitance in $\mu\text{F}$ , V = rated DC Rated Voltage in V								
Tanδ (at 120 Hz, 20°C)	Rated Voltage	400	450						
	Tanδ(max)	0.15	0.15						
Low Temperature Characteristics (at 120 Hz)	Impedance ratio shall not exceed the values given in the table below. <table border="1"> <tr> <td>Rated Voltage</td><td>400</td><td>450</td></tr> <tr> <td>Impedance Ratio   <math>Z(-25^\circ\text{C})/Z(+20^\circ\text{C})</math></td><td>8</td><td>8</td></tr> </table>			Rated Voltage	400	450	Impedance Ratio   $Z(-25^\circ\text{C})/Z(+20^\circ\text{C})$	8	8
Rated Voltage	400	450							
Impedance Ratio   $Z(-25^\circ\text{C})/Z(+20^\circ\text{C})$	8	8							
Endurance	Test Time	3,000 Hrs							
	Capacitance Change	Within ±20% of initial value							
	Tanδ	Less than 200% of specified value							
	Leakage Current	Within specified value							
	* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 3,000 hours at 105°C.								
Shelf Life Test	Test Time	1,000 Hrs							
	Capacitance Change	Within ±15% of initial value							
	Tanδ	Less than 150% of specified value							
	Leakage Current	Within specified value							
	* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1).								
Ripple Current and Frequency Multipliers	Frequency (Hz)	50 / 60	100 / 120	300	1k	10k up			
	Multiplier	0.8	1.0	1.1	1.3	1.4			
Failure percentage Failure rate	When the failure percentage / failure rate is required, please contact with us for further discussion.								

Diagram of Dimensions

Unit: mm

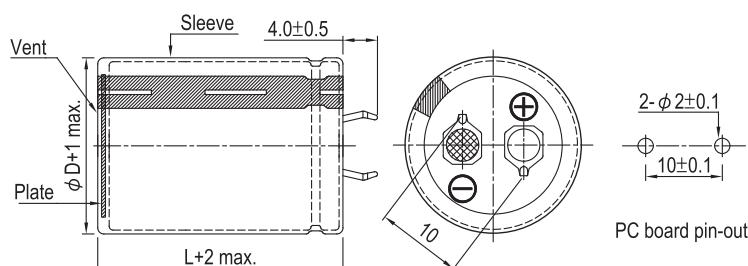



## Dimension and Permissible Ripple Current

Rated Voltage V <sub>DC</sub>	Capacitance 120 Hz, 20°C μF	ϕ D×L mm	Ripple Current 120 Hz, 105°C A/rms	Tan δ at 120 Hz, 20°C	ESR 120 Hz, 20°C Ω	LC 5 minutes mA	Part Number
<b>400</b>	100	22 × 25	1.02	0.15	1.194	0.60	LSR101M2G--A2225
	120	22 × 30	1.22	0.15	0.995	0.66	LSR121M2G--A2230
	120	25 × 25	1.22	0.15	0.995	0.66	LSR121M2G--A2525
	150	22 × 35	1.33	0.15	0.796	0.73	LSR151M2G--A2235
	180	22 × 40	1.43	0.15	0.664	0.80	LSR181M2G--A2240
	180	25 × 30	1.43	0.15	0.664	0.80	LSR181M2G--A2530
	180	30 × 25	1.68	0.15	0.664	0.80	LSR181M2G--A3025
	220	22 × 45	1.55	0.15	0.543	0.89	LSR221M2G--A2245
	220	25 × 35	1.65	0.15	0.543	0.89	LSR221M2G--A2535
	220	30 × 30	1.79	0.15	0.543	0.89	LSR221M2G--A3030
	270	22 × 50	1.68	0.15	0.442	0.99	LSR271M2G--A2250
	270	25 × 40	1.83	0.15	0.442	0.99	LSR271M2G--A2540
	270	30 × 35	2.12	0.15	0.442	0.99	LSR271M2G--A3035
	270	35 × 25	2.12	0.15	0.442	0.99	LSR271M2G--A3525
	330	25 × 50	2.12	0.15	0.362	1.09	LSR331M2G--A2550
	330	30 × 40	2.33	0.15	0.362	1.09	LSR331M2G--A3040
	330	35 × 30	2.33	0.15	0.362	1.09	LSR331M2G--A3530
	390	30 × 45	2.52	0.15	0.306	1.18	LSR391M2G--A3045
	390	35 × 35	2.52	0.15	0.306	1.18	LSR391M2G--A3535
	470	30 × 50	2.85	0.15	0.254	1.30	LSR471M2G--A3050
	470	35 × 40	2.85	0.15	0.254	1.30	LSR471M2G--A3540
	560	35 × 45	3.18	0.15	0.213	1.42	LSR561M2G--A3545
	680	35 × 50	3.21	0.15	0.176	1.50	LSR681M2G--A3550
<b>450</b>	82	22 × 25	0.96	0.15	1.456	0.58	LSR820M2W--A2225
	100	22 × 30	1.04	0.15	1.194	0.64	LSR101M2W--A2230
	100	25 × 25	1.04	0.15	1.194	0.64	LSR101M2W--A2525
	120	22 × 35	1.15	0.15	0.995	0.70	LSR121M2W--A2235
	120	25 × 30	1.22	0.15	0.995	0.70	LSR121M2W--A2530
	150	22 × 40	1.22	0.15	0.796	0.78	LSR151M2W--A2240
	150	25 × 35	1.31	0.15	0.796	0.78	LSR151M2W--A2535
	150	30 × 25	1.31	0.15	0.796	0.78	LSR151M2W--A3025
	180	22 × 45	1.35	0.15	0.664	0.85	LSR181M2W--A2245
	180	25 × 40	1.35	0.15	0.664	0.85	LSR181M2W--A2540
	180	30 × 30	1.60	0.15	0.664	0.85	LSR181M2W--A3030
	180	35 × 25	1.60	0.15	0.664	0.85	LSR181M2W--A3525
	220	25 × 45	1.55	0.15	0.543	0.94	LSR221M2W--A2545
	220	30 × 35	1.71	0.15	0.543	0.94	LSR221M2W--A3035
	270	25 × 50	1.74	0.15	0.442	1.05	LSR271M2W--A2550
	270	30 × 40	1.90	0.15	0.442	1.05	LSR271M2W--A3040
	270	35 × 30	1.90	0.15	0.442	1.05	LSR271M2W--A3530
	330	30 × 45	2.20	0.15	0.362	1.16	LSR331M2W--A3045
	330	35 × 35	2.20	0.15	0.362	1.16	LSR331M2W--A3535
	390	30 × 50	2.40	0.15	0.306	1.26	LSR391M2W--A3050
	390	35 × 40	2.42	0.15	0.306	1.26	LSR391M2W--A3540
	470	35 × 45	2.67	0.15	0.254	1.38	LSR471M2W--A3545
	560	35 × 50	2.85	0.15	0.213	1.50	LSR561M2W--A3550

## Part Numbering System

LSR Series	220μF	±20%	400V	4.0±0.5mm	30 ϕ ×30L	General Purpose
<b>LSR</b>	<b>221</b>	<b>M</b>	<b>2G</b>	<b>--</b>	<b>A</b>	<b>3030</b>
Series Name	Capacitance	Capacitance tolerance	Rated voltage	Terminal type	Terminal length	Case size
Example:	Example:	Example:	Type   Symbol	Type   Symbol	"--": 6.3±1.0 mm	Application

Series Name: LSR  
 Capacitance: 220 μF  
 Capacitance tolerance: M = ±20%, K = ±10%  
 Rated voltage: 400V  
 Terminal type: 2 pins | --  
 Terminal length: 6.3±1.0 mm  
 Case size: 30 ϕ ×30L  
 Application: Example:  

ϕ D×L	Code
22×30	2230
25×25	2525
30×40	3040

Note: For more details, please refer to "Part Numbering System - Snap-in Type" on page 188.



## Typical Endurance Curves

